

SPECIFICATION
OIL IMMERSED TRANSFORMER
800 KVA. 3 Ph. 50 Hz
22000 - 400 / 230 V.

CHATCHAI TRANSFORMER CO.,LED 35/4 หมู่8 ต. ท่าไม้ อ.กระทุ่มแบบ จ. สมุทรสาคร Tel. 085-2961053 085-3151766

Trai ication

Quo Cust

Proj

Rated power		KVA	800
Type of transformer		-	Oil immersed (Hermetically sealed)
Standard		-	IEC 76
Cooling System		-	ONAN
No. Of phase		-	3
Frequency		Hz	50
Rate of voltage : F	Primary	v.	22000
: S	econdary	V.	400/230
Vector group		_	Dyn 11
Tapping Type	e	-	Off Circuit Tap Changer
	of steps	-	5
Pero	centage of tapping	-	_ ⁺ 2 x 2.5 %
Impedance voltage at 75 C		%	4
NO - Load current		%	1
Ambient temperature		C	40
Average Temperature rise of winding		C	65
Average Temperature rise of top oil		C	60
Noise level not more than		dB	56
No - Load loss		Watt	1200
Load loss at 75 C		Watt	9900
	: 25 % of rate power	%	98.94
Efficiency	: 50 % of rate power	%	98.08
at P.F. = 1	: 75 % of rate power	%	98.79
	: 100 % of rate power	%	98.56
Voltage regulation	: at P.F. = 0.8	%	3.22
	: at P.F. $= 0.9$	%	2.71
	: at P.F. $= 1$.	%	1.17
Impulse Withstand	: Primary winding	KV.	125
Voltage	: Secondary winding	KV.	-
Power Frequency	: Primary winding	KV.	50
	: Secondary winding	KV.	3
Terminal arrangement	H.V. Side		Cable
	L.V. Side		Cable
Installation on			Pole mounted / Plantform



CHATCHAI TRANSFORMER CO.,LED


35/4 หมู่8 ต. ท่าไม้ อ.กระทุ่มแบบ จ. สมุทรสาคร Tel. 085-2961053 085-3151766

Trai cation

Quo

Customer : Project :

Rated power	800
Type of transformer	Oil immersed (Hermetically sealed)
Accessories	
H.V. Bushing with terminal connector	Included
L.V. Bushing with terminal connector	Included
Grounding pad or earth terminal	Included
upper fillter press sampling valve	Included
Oil drain, filter press sampling valve	Included
Name plate	Included
Arcing Horn	Included
Skid Base	Included
Mechanical pressure relief device	Included (without contact)
Oil level indicator	Included (with contact)
	Included (with contact)
	Included (with contact)
Testing	
- Routine test	
Ratio test at each position of tap	Included
Polarity and phase relation test	Included
Resistance measurement	Included
No - Load loss and exciting current test	Included
Impedance and load loss test	Included
Applied potential test	Included
Induced potential test	Included
Insulation resistance test	Included
Oil test	Included
- Specia test	
Impulse withstand test	Included (TR lab)
Temperature rise test	Included (TR lab)

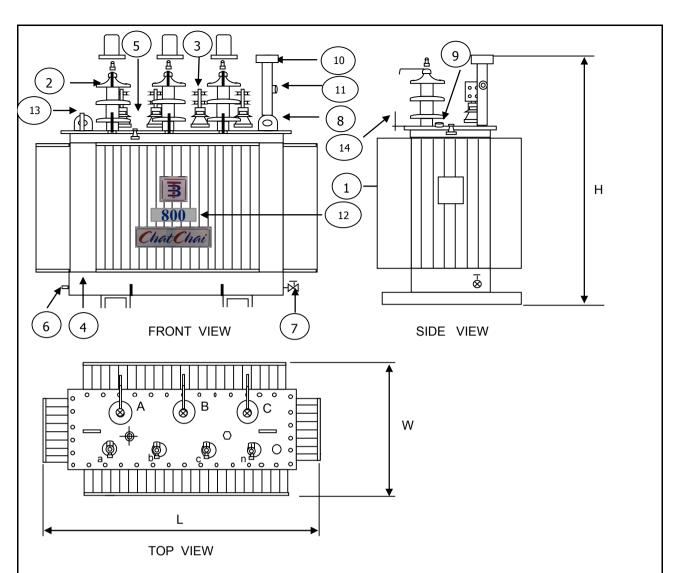

NO	DESCRIPTION	QTY.
1	NAMEPLATE WITH CONNECTION DIAGRAM	1
2	HV. BUSHING W / TERMINAL CONNECTOR	3
3	LV. BUSHING W / TERMINAL CONNECTOR	4
4	TANK	1
5	TAP CHANGE	1
6	EARTH TERMINAL	1
7	OIL DRAIN VALAE	1
8	LIFTING EYES ON THE COVER	2
9	OIL LEVEL INDICATOR	1
10	OIL FILLING PIPE	1
11	OIL LEVEL GAUGE	1
12	LOGO	1
13	THERMOMETER POCKET	1
14	ARCING HORN	3

ฉัตรชัย หม้อแปลงไฟฟ้า					
Dimension in millimetres			Total wt.	Oil	
	Н	L	W	(Kgs.)	(Litres)
	1780	1690	920	2650	630
DESIGN No.		001000TR0052003		S/O No.	A52001


PRELIMINARY DRAWING

This drawing is for estimation only showing approximate dimensions and should not be used for actual purposes In case of order a definite drawing will be produced for formal approval

NAME	TITL
DRN.BY	Ĭ
CHK.BY	
APP. BY	TYP

TITLE: OUTLINE DRAWING
800 kVA. 3 Ph. Dyn11
22000 - 400 / 230 v.

TYPE: Hermeticall sealed tank

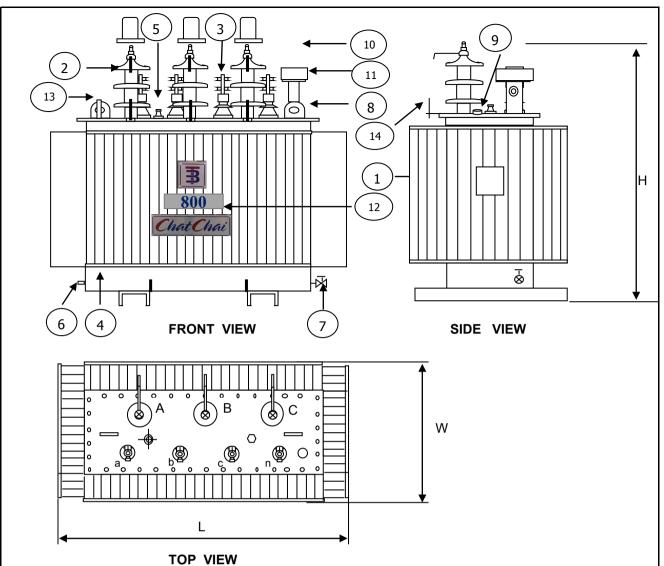

NO	DESCRIPTION	QTY.
1	NAMEPLATE WITH CONNECTION DIAGRAM	1
2	HV. BUSHING W / TERMINAL CONNECTOR	3
3	LV. BUSHING W / TERMINAL CONNECTOR	4
4	TANK	1
5	TAP CHANGE	1
6	EARTH TERMINAL	1
7	OIL DRAIN VALAE	1
8	LIFTING EYES ON THE COVER	2
9	OIL LEVEL INDICATOR	1
10	OIL FILLING PIPE	1
11	OIL LEVEL GAUGE	1
12	LOGO	1
13	THERMOMETER POCKET	1
14	ARCING HORN	3

ฉัตรชัย หม้อแปลงไฟฟ้า					
Dimension in millimetres				Total wt.	Oil
	Н	L	W	(Kgs.)	(Litres)
	1780	1690	920	2650	630
DESIGN No.		001000TR0052003		S/O No.	A52001

PRELIMINARY DRAWING

This drawing is for estimation only showing approximate dimensions and should not be used for actual purposes In case of order a definite drawing will be produced for formal approval

NAME TITLE : DRN.BY

CHK.BY

APP. BY

TLE: OUTLINE DRAWING 800 kVA. 3 Ph. Dyn11 22000 - 400 / 230 v.

TYPE : Hermeticall sealed tank